GLARE SCREEN (MEDIAN)

NOTE:
All Blades To Be Installed
Perpendicular To The Plane
Of The Barrier Top

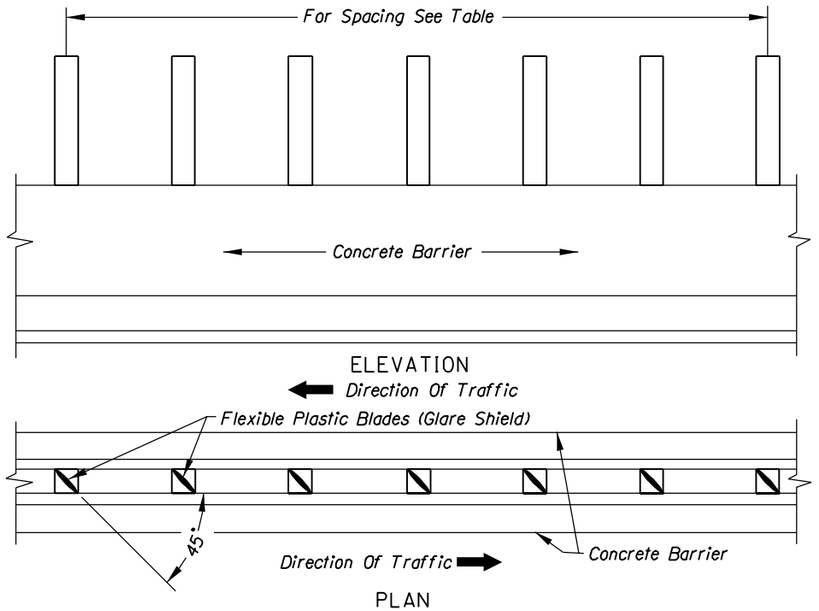

MEDIAN STA. TO STA.	*FLEXIBLE PLASTIC BLADES SPACING = CENTER TO CENTER	

* Spacing Is Based On 9½" Blade Width. If Narrower Blades Are Used, Spacing Will Be Reduced.

GLARE SHIELD INSTALLATION DETAIL

NOTE:
Install Reflectors Only On Median
Barrier At 2'-6"± Intervals

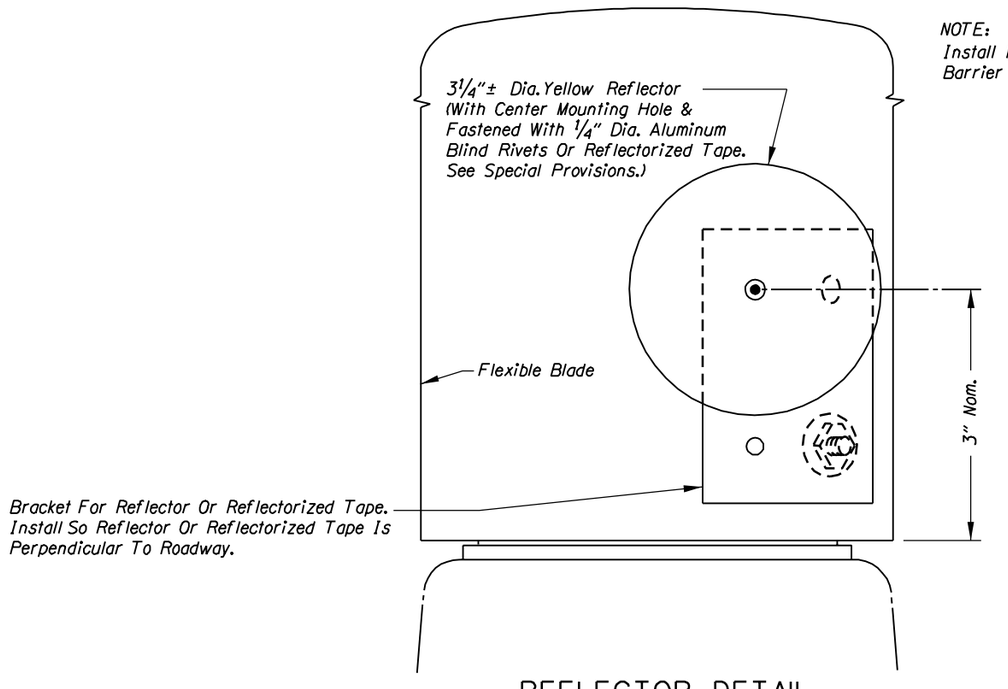

REFLECTOR DETAIL

OREGON DEPARTMENT OF TRANSPORTATION

SHEET NO.

e_detail120.dgn 6-9-03

DET 120