GLARE SCREEN (FRONTAGE ROAD)

"All Dimensions Are In mm's Unless Otherwise Noted."

NOTE:
All Blades To Be Installed Perpendicular To The Plane Of The Barrier Top

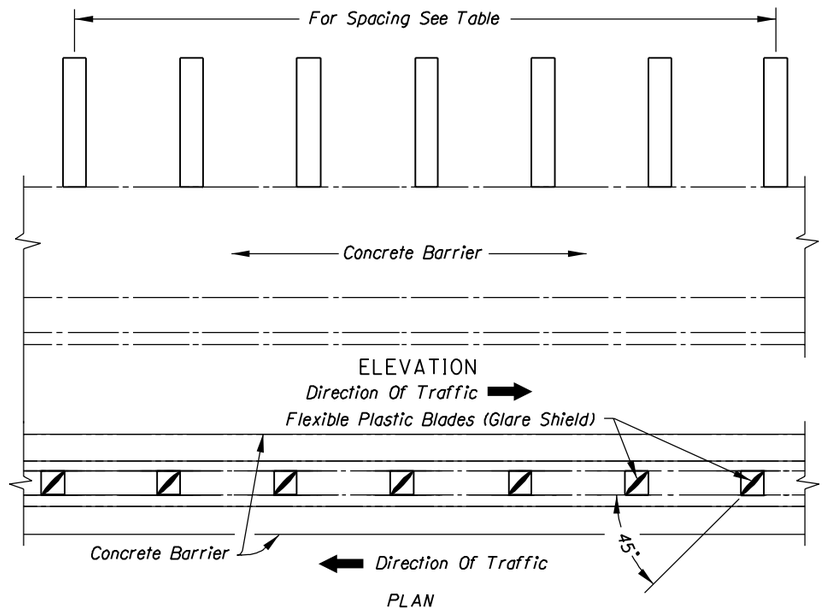

SIDE STA. TO STA.	*FLEXIBLE PLASTIC BLADES SPACING = CENTER TO CENTER	

* *Spacing Is Based On 230 mm Blade Width. If Narrower Blades Are Used, Spacing Will Be Reduced.*

GLARE SHIELD INSTALLATION DETAIL

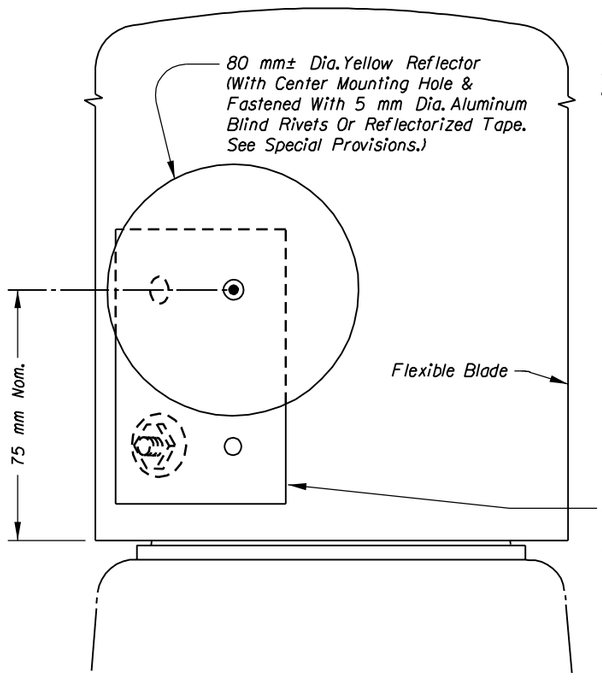

NOTE:
Install Reflectors Only On Median Barrier At .75 m ± Intervals

REFLECTOR DETAIL

OREGON DEPARTMENT OF TRANSPORTATION

SHEET NO.

ne7360ab/usr/mdet/detail115.dgn 6-10-03

DET 115